



Science

## **EXPERIMENTAL STUDY OF WEAR IN SHEET METAL DURING VARIOUS FORCES**

**Rakesh Kumar Ahirwar<sup>\*1</sup>, Prof. A.K. Jain<sup>2</sup>**

<sup>\*1</sup>ME IVth Sem Student, Jabalpur Engineering College, Jabalpur (M P), India

<sup>2</sup>Associate Professor, Jabalpur Engineering College, Jabalpur (M P), India

**DOI:** <https://doi.org/10.5281/zenodo.345635>

---

### **Abstract**

The experiments are conducted for different clearances between punch and die. It is observed that, beyond a clearance for each thickness of the steel sheet metal, however, below the critical clearance, scratches on the surface of the sheet metal were seen due to wear. Sheet metal is metal formed by an industrial process into thin, flat pieces. It is one of the fundamental forms used in metalworking and it can be cut and bent into a variety of shapes.

**Keywords:** Wear; Sheet Metal Forming; Lever; Guide Way.

**CITE THIS ARTICLE:** Rakesh Kumar Ahirwar, and Prof. A.K. Jain. (2017). “EXPERIMENTAL STUDY OF WEAR IN SHEET METAL DURING VARIOUS FORCES.” *International Journal of Research - Granthaalayah*, 5(2), 162-167. <https://doi.org/10.5281/zenodo.345635>.

---

### **1. Introduction**

The larger the gauge number, the thinner the metal. Commonly used steel sheet metal ranges from 30 gauges to about 8 gauge. Gauge differs between ferrous (iron based) metals and nonferrous metals such as aluminum or copper; copper thickness, for example are measured in ounces (and represent the thickness of 1 ounce of copper rolled out to an area of 1 square foot). There are many different metals that can be made into sheet metal, such as aluminum, brass, copper, steel, tin, nickel and titanium. For decorative uses, important sheet metals include silver, gold, and platinum (platinum sheet metal is also utilized as a catalyst).

## 2. Experimental Setup

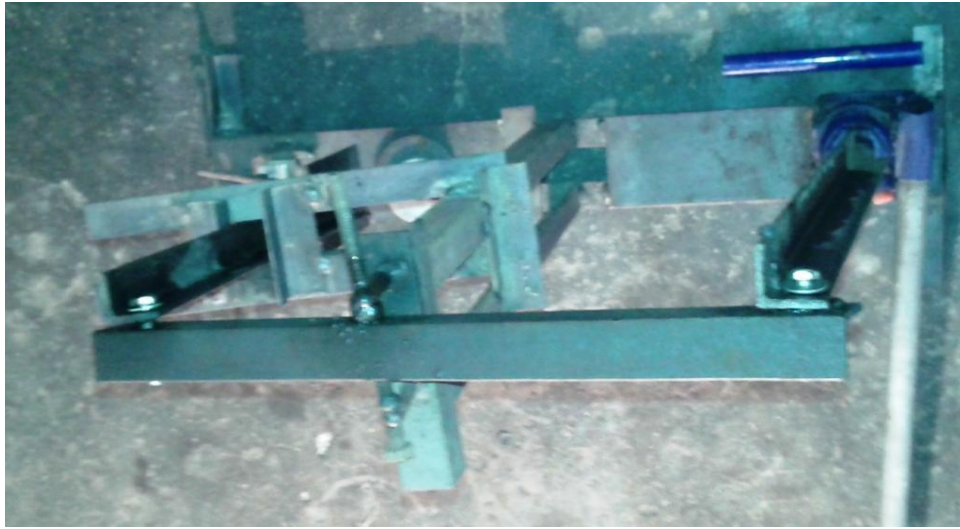


Figure 1: Experimental setup



Figure 2: Linkages



Figure 3: sheet metal clamping mechanism



Figure 4: Guide way

### 3. Results and Discussion

Table 1: Spring back for 1.2 mm Steel sheet metal and Applied load in 20 N

Sr. No.	Clearance in mm	Spring back in degree
1	1.1	2.2
2	1.2	3.2
3	1.3	4.8
4	1.4	5.0
5	1.5	5.2

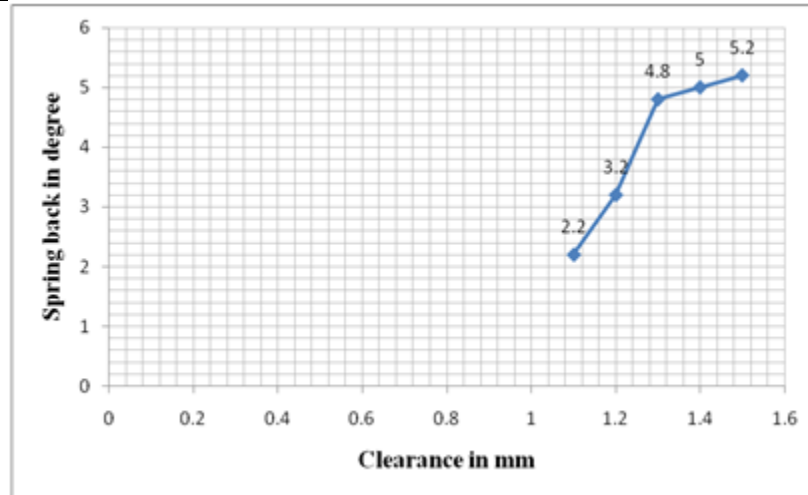


Figure.5. Graph of clearance and spring back

Table 2: Spring back for 1.4 mm steel sheet metal and applied load in 40 N

Sr. No.	Clearance in mm	Spring back in degree
1	2.0	3.1
2	2.2	3.5
3	2.4	3.8
4	2.6	4.0
5	2.8	4.4

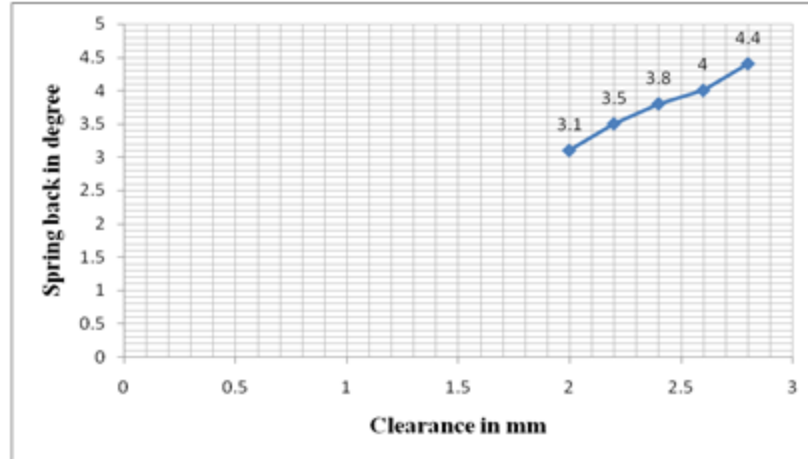


Figure 6: Graph of clearance and spring back

Table 3: Spring back for 1.6 mm steel sheet metal and applied load in 60 N

Sr. No.	Clearance in mm	Spring back in degree
1	3.1	2.9
2	3.2	3.1
3	3.4	3.3
4	3.6	3.6
5	3.8	3.8

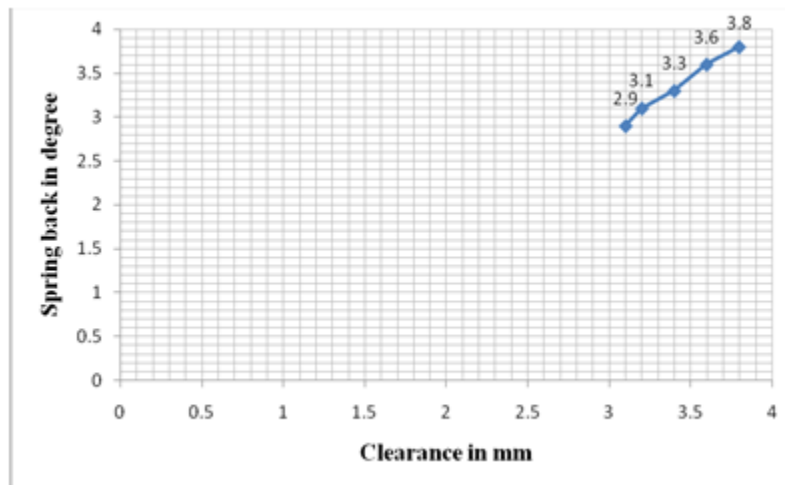


Figure 7: Graph of clearance and spring back

Table 4: Spring back for 1.8 mm steel sheet metal and applied load in 80 N

Sr. No.	Clearance in mm	Spring back in degree
1	4.0	3.4
2	4.2	3.6
3	4.4	5.4
4	4.6	4.8
5	4.8	4.6

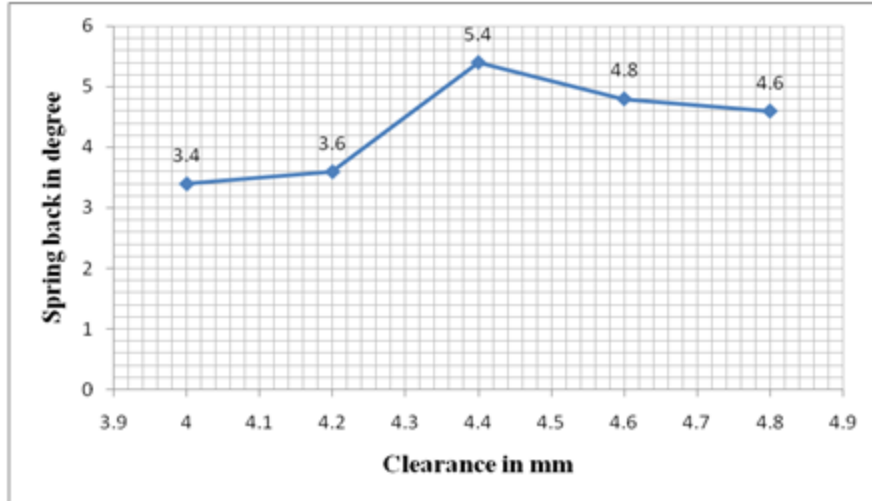


Figure 8: Graph of clearance and spring back

Table 5: Spring back for 2 mm steel sheet metal and applied load in 100 N

Sr. No.	Clearance in mm	Spring back in degree
1	5.0	4.0
2	5.2	4.2
3	5.4	4.6
4	5.6	4.7
5	5.8	4.8

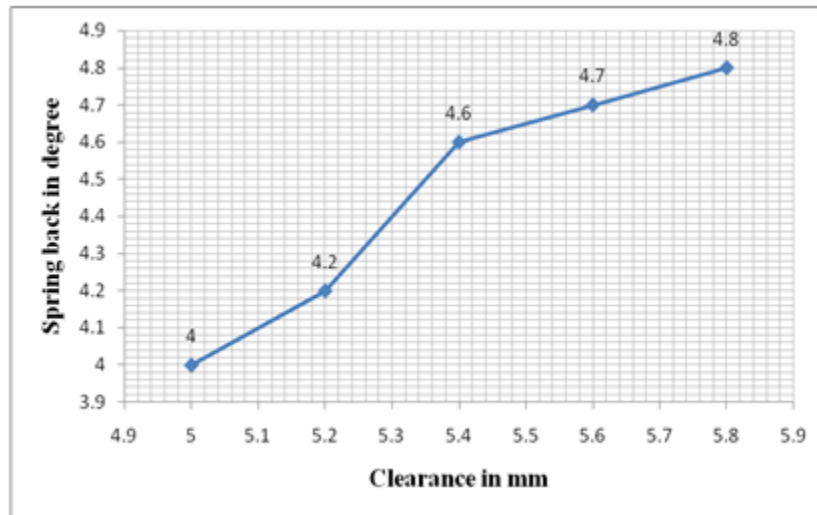


Figure 9: Graph of clearance and spring back

#### 4. Conclusions

Numbers of specimens with various thicknesses are prepared and the experiments are carried out for different clearances. It is observed that as the clearance reduces, the wear rate increases on the punching surface. There was an increase in the spring back effect as well as the fracture

propagation as the clearance between punch and die was increased. We are found out the maximum spring back are 5.4 degree using of Clearance are 4.4 mm which are shown in Table.4.

## References

- [1] Ramalho, Study of the relationships friction – contact stresses using load scanner tests, in: Proceedings 11th Nordic Symposium on Tribology – NORDTRIB2004, 2004, pp. 699–707.
- [2] Andrey V. Gnatov., Pulsed electromagnetic attraction of nonmagnetic sheet metals , Journal of Materials Processing Technology 214 (2014) pp390– 401
- [3] Ibrahim Demirci H, Yas\_ar M, Demiray K. The theoretical and experimental investigation of blank holder forces plate effect in deep drawing process of Al 1050 material. Mater Des 2008;29(2):526–32.
- [4] Jawad Waleed Khalid. Investigation of contact interface between the punch and blank in deep drawing process. J Eng Technol 2007;25(3):370–82.
- [5] Vladimirov IvayloN, Pietryga MichaelP, Reese Stefanie. Anisotropic finiteelastoplasticitywith nonlinear kinematic and isotropic hardening and application to sheet metal forming. Int J Plasticity 2010; 26:659–87.
- [6] Fereshteh-Saniee F, Montazeran MH. A comparative estimation of the forming load in the deep drawing process. J Mater Process Technol 2003; 140:555–61.
- [7] Lange Kurt. Handbook of metal forming. Society of Manufacturing Engineers; 1985.
- [8] Meguid SA, Refaat MH. Finite element analysis of the deep drawing process using variational inequalities. Finite Elements Anal Des 1997; 28:51–67.
- [9] Suchy I. Handbook of die design. 2nd ed. McGraw-Hill Publishing; 2006. p. 353–400.
- [10] Garcia-Romeu ML, Ciurana J, Ferrer I. J Mater Process Technol 2007;191(1– 3):174–7.